


GLAND PACKING



Pressure (bar)	40	20	200
Speed (m/s)	25	2	1.5
PH Range	0 -14		
Temp (C)	to 650 (in steam)		
	to 450 (in oxidising)		

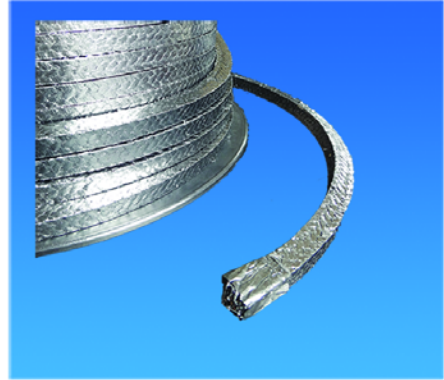

Greentek 5000

Pure Flexible Graphite Packing (Greentek 5000)

Greentek 5000 is made from expanded graphite yarn braided into through all kind of technology of braiding.

Service

Greentek 5000 is suitable for all application such as Boiler feed pump, condensate pump, expansion joints and high temperature groove packing etc.

Standard Size	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"
Lenght (m/ 5.5 lb)	-	53.5	22.7	-	-	-
Lenght (m/ 11 lb)	-	-	-	25.8	17.1	19.1

Note: Approximate length

GLAND PACKING

Pure Flexible Graphite Packing with Inconel wire(Greentek 5000 II)

It is suitable for static application such as super heated water, hot air, duct exhaust, stem valve, etc. (Note: not suitable for rotating application)



Pressure (bar)	-	-	300
Temp (C)	to 650 (in steam)		
	to 450 (in oxidising)		



Graphite Ring

Graphite ring is molded with precision dies designed for critical sizing. The ring's compressive material is squeezed creating a seal on the inner and outer diameter of the ring.

